


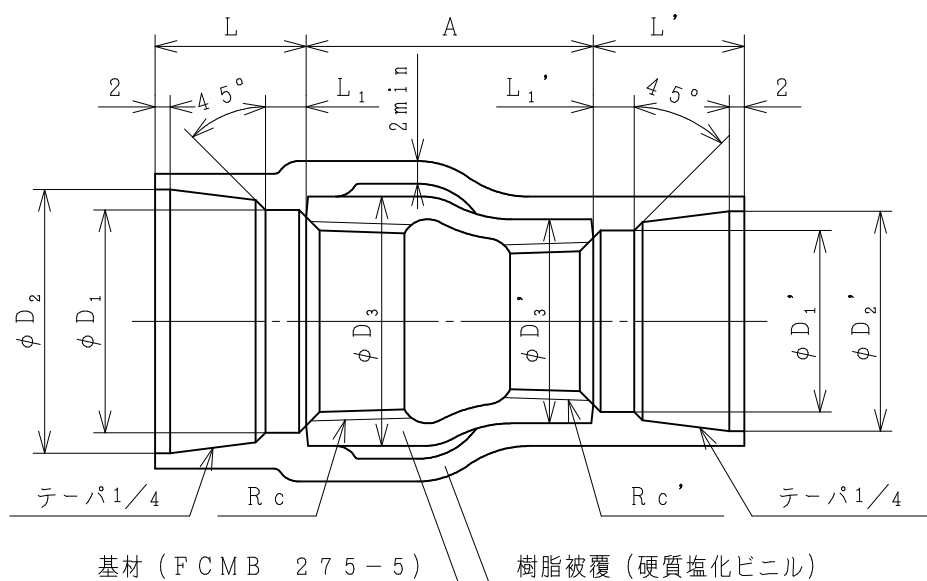

単位 : mm

呼び	ねじの呼び Rc×Rc'◇	A◇	L	L ₁	L'	L ₁ '	φD ₁	φD ₂	φD ₃	φD ₁ '	φD ₂ '	φD ₃ '
3/4×1/2	Rc3/4×Rc1/2	38	20	5.4	20	6.8	29.5	34.9	33	24	29.1	27
1×1/2	Rc1×Rc1/2	42	25	8.7	20	6.8	36.3	42.1	41	24	29.1	27
1×3/4	Rc1×Rc3/4	42	25	8.7	20	5.4	36.3	42.1	41	29.5	34.9	33
1 1/4×1/2	Rc1 1/4×Rc1/2	48	25	8.7	20	6.8	45	50.8	50	24	29.1	27
1 1/4×3/4	Rc1 1/4×Rc3/4	48	25	8.7	20	5.4	45	50.8	50	29.5	34.9	33
1 1/4×1	Rc1 1/4×Rc1	48	25	8.7	25	8.7	45	50.8	50	36.3	42.1	41
1 1/2×1/2	Rc1 1/2×Rc1/2	52	25	8.7	20	6.8	51	56.7	56	24	29.1	27
1 1/2×3/4	Rc1 1/2×Rc3/4	52	25	8.7	20	5.4	51	56.7	56	29.5	34.9	33
1 1/2×1	Rc1 1/2×Rc1	52	25	8.7	25	8.7	51	56.7	56	36.3	42.1	41
1 1/2×1 1/4	Rc1 1/2×Rc1 1/4	52	25	8.7	25	8.7	51	56.7	56	45	50.8	50
2×1	Rc2×Rc1	58	26	8.9	25	8.7	62.7	68.1	69	36.3	42.1	41
2×1 1/4	Rc2×Rc1 1/4	58	26	8.9	25	8.7	62.7	68.1	69	45	50.8	50
2×1 1/2	Rc2×Rc1 1/2	58	26	8.9	25	8.7	62.7	68.1	69	51	56.7	56

備考

- 樹脂被覆色 アイボリー色
- ◇を除く寸法は参考寸法です

品名	外面樹脂被覆継手 P C 継手 (ねじ込み式) 径違いソケット		
略号	RS	年月日	2024-8-1
桑名金属工業株式会社		図番	G16-25049